

# **SonoDefense**


# Advanced cybersecurity and data privacy protection

Healthcare institutions are under growing threat of cyberattack – and the implications for data security, patient privacy, and the quality and cost of care are staggering.

Protecting against these threats and safeguarding your patients and your institution requires more than anti-virus protection. SonoDefense is GE Healthcare's multi-layer strategic approach to cybersecurity and patient data privacy for ultrasound.

### Designed to help healthcare providers:

- Keep the ultrasound system safe and functional in the face of cyberthreats
- Protect patient data on the system from unauthorized access
- Enable successful implementation of HIPAA and security policies while still managing daily workflow

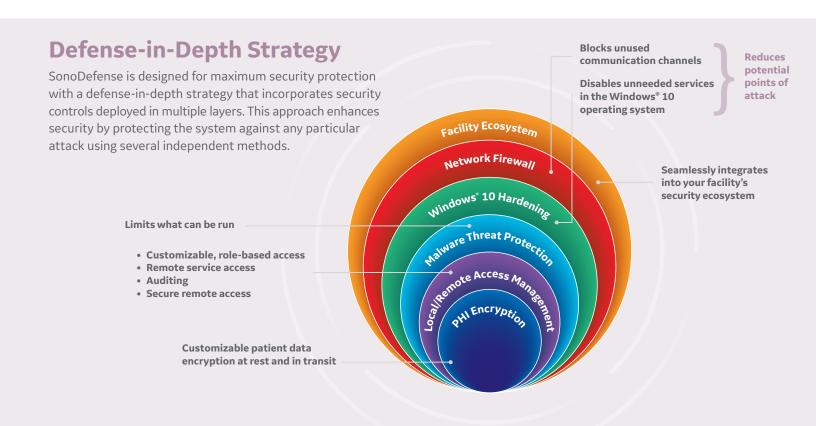

The SonoDefense defense-in-depth strategy consists of SIX LAYERS, with each layer enhancing the overall security of the system and helping to protect patient data.

#### LAYER 1

# **Facility Ecosystem**

SonoDefense is designed to fit seamlessly into your facility's existing security ecosystem. Vulnerability scan mode allows the system to be integrated into a facility's vulnerability assessment infrastructure.

### LAYER 2

### **Network Firewall**

A malicious cyberattack requires a point of entry. The strict firewall layer reduces the potential points of attack by disabling all unused ports and the DICOM® firewall limits DICOM connections to customer defined devices.

#### LAYER 3

# Windows 10 Hardening

Windows 10 IoT is a version of Windows 10 specifically made for embedded systems with an extended support model. Its applications are vast compared to the needs of the SonoDefense-enabled system. Accordingly, we have configured the system so that all software services embedded in the operating system that are not explicitly needed to run the medical applications are removed or disabled. This "hardening" minimizes the parts of the system that are exposed to threats, helping to reduce the potential for attack. The Windows 10 IoT configuration, including security profiles, is set using guidance from standards including National Institute of Standards and Technology (NIST) Cybersecurity Framework, and Center for Internet Security (CIS) best practices.

#### LAYER 4

### **Malware Threat Protection**

The Windows 10 security features provide the foundation for SonoDefense's malware protection, enforcing restrictions on applications that can be run on the ultrasound system.

- Known malicious software and potentially unwanted applications (PUAs) are explicitly blocked
- Whitelisting only permits trusted applications that meet secure implementation guidelines to run on the ultrasound system
- Kiosk mode disables the user's access to the internet and the Windows desktop, which are common malware vectors for spreading viruses through email services, web browsers, and other applications
- · Media auto-run is disabled and BIOS access requires a password
- · Security tools actively monitor for malware behavior

#### LAYER 5

# Local/Remote Access Management

SonoDefense provides cyberdefense for the real world of patient care. Its extensive, customizable, role-based user access enables users to successfully implement HIPAA and security policies, while still ensuring efficient and productive daily workflows.

- **User roles** Custom creation of user roles and assignment rights for roles puts the institution in control
- User management Individual users are created and assigned customizable roles, dictating their allowable access to and manipulation of patient data and system configuration
- Password policies Policies include length and content
- Audit report An extensive list of events, including patient data and system access, are recorded in an audit log to facilitate an incident investigation
- Centralized logging support Supports industry standard syslog protocol with optional encryption for transmitting system and audit logs to customer controlled log server
- Remote service access Remote service is only allowed if authorized by local user on device
- Local service access Protected by a two-factor authentication scheme

#### LAYER 6

### **PHI Encryption**

The encryption layer of SonoDefense security software is designed to protect data privacy and assist your organization in complying with HIPAA/HITECH regulations. Safeguards include:

- Data on the system's customer data volumes can be encrypted to provide protection in the event of a stolen device or hard drive
- Patient data can be deleted from the hard drive in a way that is cryptographically unreadable and unrecoverable
- All remote service access is encrypted using FIPS compliant algorithms

# Security-related features for Invenia<sup>™</sup> ABUS 2.0 ultrasound systems<sup>¹</sup>

### All features are standard unless otherwise noted

' '	irewall policy blocks all unnecessary ports and limits DICOM ommunications to only defined devices	
OS – Windows 10 IoT		
OS hardening	<ul> <li>Configuration settings use guidance from NIST Cybersecurity Framework, and CIS best practices</li> <li>Disabled unnecessary services, protocols and telemetry</li> <li>Secure boot</li> </ul>	
Malware protection	<ul> <li>Explicit blocking of known malicious software and PUAs</li> <li>Whitelisting</li> <li>Device Guard</li> <li>Disable auto-run for removable media</li> <li>Windows Defender</li> </ul>	

Access a	nd access lev	el	
(Requires	administrator	right to	configure

### Ability to create user groups

Passwords

	Ability to assign patient data access rights to each group	<ul><li>Create</li><li>Update/Access</li><li>Delete</li><li>Export (removable media)</li></ul>
	Ability to assign other rights	<ul> <li>Administrator</li> <li>Configuration adjustments</li> <li>Basic</li> <li>Imaging</li> <li>Advanced</li> <li>Audit and system logs</li> <li>Capture</li> <li>Capture with PHI</li> <li>Active Service Desktop</li> </ul>
	Create users and assign to groups	
(	Configurable emergency user rights	
	Choose login ID list (enabled or disabled)	

Usage

 Policies – provides the ability to specify password strength policies for application user accounts

- Minimum password length

(1-20 characters)

– Password complexity

Passwords, continued	<ul> <li>Minimum number of character sets (0-4)</li> <li>Minimum number of upper case characters (0-3)</li> <li>Minimum number of lower case characters (0-3)</li> <li>Minimum number of digits (0-3)</li> <li>Minimum number of symbols (0-3)</li> </ul>
Session management	<ul> <li>Lock screen timeout – automatically locks screen and requires password reentry after specified period of inactivity (disabled, 1-60 minutes)</li> <li>Auto logoff timeout – automatically logs off a user after the specified period of inactivity (disabled, 1-60 minutes)</li> </ul>
Security baseline	Allows an administrator to conveniently select from several factory configured security policy options as a starting point

### Local user management policy

Requires administrator right to configure,

User management restricted to administrator rights

Local user management

User display ID can be unique from login ID

Ability to temporarily disable a user

Ability to force a password reset

Support for multiple unique user accounts

Support for multiple unique administrator accounts

Can combine with remote users

# Security-related features, continued

All features are standard unless otherwise noted

### Remote service access

FIPS 140-2 compliant encryption

Remote control is only allowed if authorized by local user on device

No inbound open ports required

Additional features		
Local service access	Secure Service Access (SSA)	
Windows local user accounts	Passwords for all accounts may be changed	
Hard drive encryption	<ul> <li>AES-256</li> <li>Automatic unlock tied to system hardware, USB key, or manual password entry</li> </ul>	
Syslog client for distributed log file processing		
Internet protocol address standard	• IPv4	
Vulnerability scan mode	• Nessus®	
Software security updates	Customer can download and install digitally signed software security updates on the system	

### **Auditing**

Audit and system log creation with or without PHI

	System startup and shutdown     User login and logout
	• Transfer of DICOM instances
Sample audit events	Data Import/Export
	<ul> <li>Display, modification, and deletion of images and patient information</li> </ul>
	User management events



SonoDefense is applicable to the ABUS scan station console. The Invenia ABUS Viewer is a software only solution. Unless specifically related to a product feature, cybersecurity and data protection is to be provided by hosting platform.

### **References:**

1. Unless otherwise noted, the SonoDefense feature set described in this document applies to Invenia ABUS 2.1.0 software and above.

Product may not be available in all countries and regions. Full product technical specification is available upon request. Contact a GE Healthcare Representative for more information. Please visit www.gehealthcare.com/promotional-locations. Data subject to change.

© 2020 General Electric Company.

GE, the GE Monogram, and Invenia are trademarks of General Electric Company. DICOM is a trademark of the National Electrical Manufacturers Association.

Windows is a registered trademark of Microsoft Corporation.

Nessus is a trademark of 2020 Tenable Inc.

Reproduction in any form is forbidden without prior written permission from GE. Nothing in this material should be used to diagnose or treat any disease or condition. Readers must consult a healthcare professional.

March 2020 JB76812XX

